
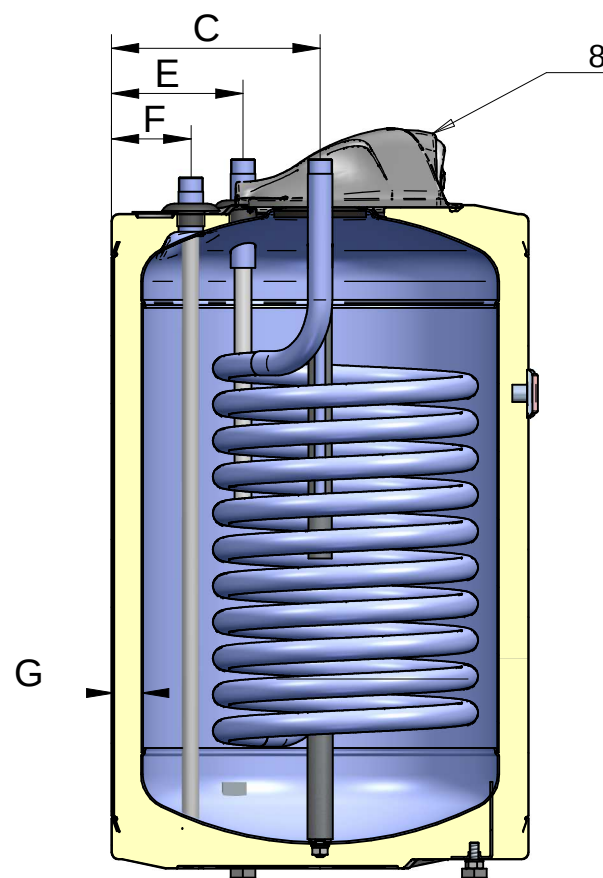


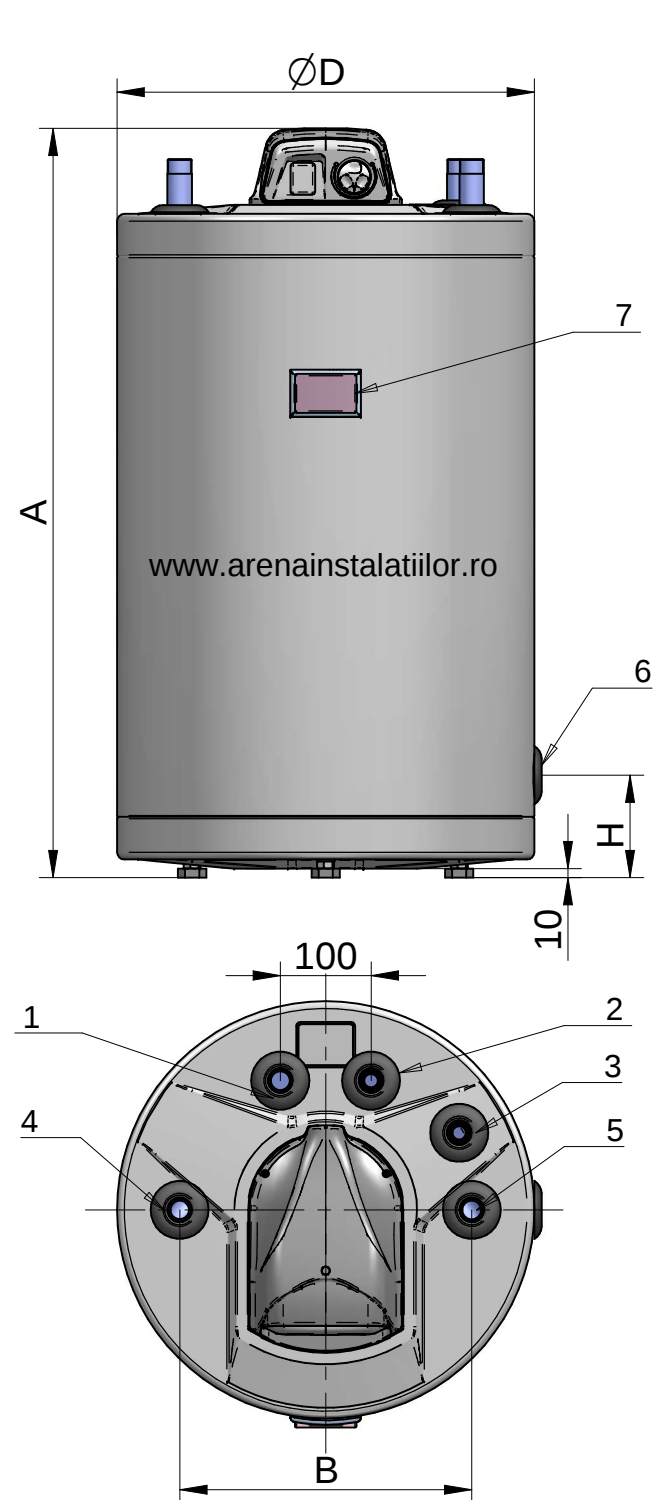

FREE STANDING WATER HEATERS WITH HEAT EXCHANGER

PARAMETERS

Model	...	72265FST	72270FST	72266FST	72280FST	72281FST
Rated volume	L	80	100	120	150	200
Energy efficiency class	...	B	B	B	B	C
Standing loss	W	45	48	51	54	72
Rated pressure	MPa	0.6	0.6	0.6	0.6	0.6
Heat exchanger surface area	m ²	0.74	1.01	1.29	1.22	1.68
Heat exchanger inside volume	L	3.6	4.9	6.3	6	8.1
Maximum heat exchanger pressure	MPa	0.6	0.6	0.6	0.6	0.6
Maximum heat exchanger temperature	°C	85	85	85	85	85
Weight	kg	36.5	44.5	49	64	87

CONNECTIONS

1: Hot water outlet	G3/4 M	G3/4 M	G3/4 M	G3/4 M	G3/4 M
2: Cold water inlet	G3/4 M	G3/4 M	G3/4 M	G3/4 M	G3/4 M
3: Circulation	G3/4 M	G3/4 M	G3/4 M	G3/4 M	G3/4 M
4: Heating coil - Feed	G3/4 M	G3/4 M	G3/4 M	G3/4 M	G3/4 M
5: Heating coil - Return	G3/4 M	G3/4 M	G3/4 M	G3/4 M	G3/4 M
6: Drain	G1/2 F	G1/2 F	G1/2 F	G1/2 F	G1/2 F
7: Temperature indicator	Yes	Yes	Yes	Yes	Yes
8: Control panel for heat exchanger	Yes	Yes	Yes	Yes	Yes

DIMENSIONS

A	mm	835	1015	1180	1025	1265
B	mm	322	322	322	364	364
C	mm	230	230	230	190	190
D	mm	460	460	460	586	586
E	mm	145	145	145	356	356
F	mm	90	90	90	100	100
G	mm	32	32	32	43	43
H	mm	125	125	125	120	120