





NMT MINI PRO 25/60-130

NMT MINI

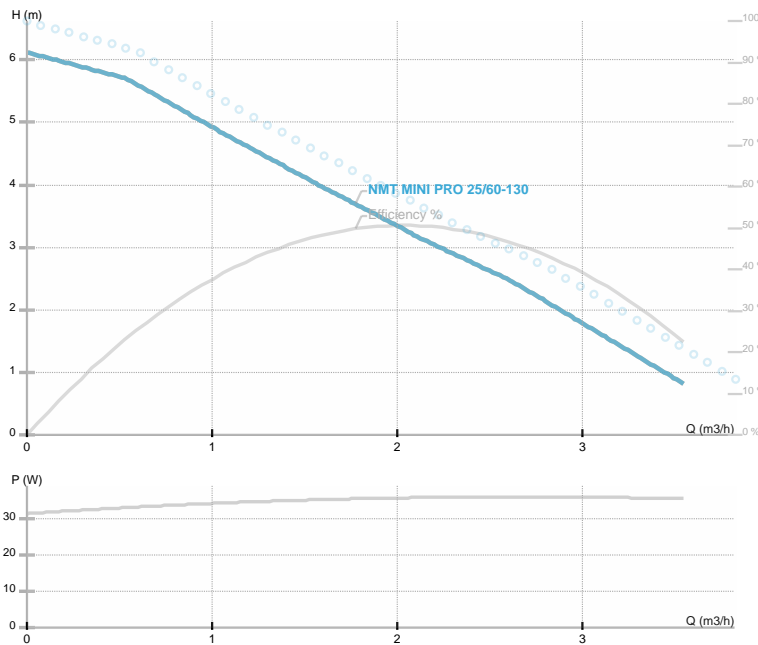

Seria produsului	979525419
Alimentare	1~230 V
Protectie	IP44
Q max	4.0 [m³/h]
H max	6.1 [m]
Rotatii pe minut RPM	4800 [1/min]
Consumul de energie	35 [w]
Consum curent	0.32 [A]
Fluide aprobate	Water VDI 2035, glycol 40%
Temperatura agentului	-10.0 ÷ 110.0 [°C]
Clasa de izolatie	F
DN	25 [mm]
Racord	G 1 ½
Greutate	1,65 [kg]
Distanta intre axe	130 [mm]
Aprobari	
EEL	0,16
Eficienta	51,8 [%]
Materialul elicei	Noryl Fe 1630PW
Materialul rulmentului	Grafit fara plumb
Materialul axului	AISI 420
Materialul hidraulic	Fonta
Frecventa	50/60 Hz
Conexiune	G 1 ½
Presiune maxima	1.0 MPa
Temperatura maxima ambientala	40 deg C

Dimensiuni de gabarit

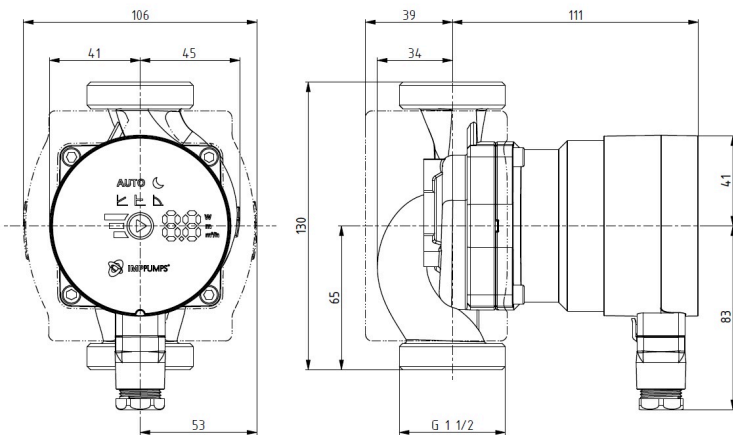

Schema electrica