




NMT SMART II 32/120-180

979528392

NMT SMART II / Electronically regulated circulating pump

GENERAL

Seria produsului	979528392		
Product name	NMT SMART II 32/120-180		
Seal type		EEI	0,18
Greutate	3,00 kg		
H max	12.2 m	H min	0.0 m
Q max	11.9 m3/h	Q min	0.0 m3/h
	%		
Nivelul functional de zgomot [dB(A)]	≤43 dB(A)		

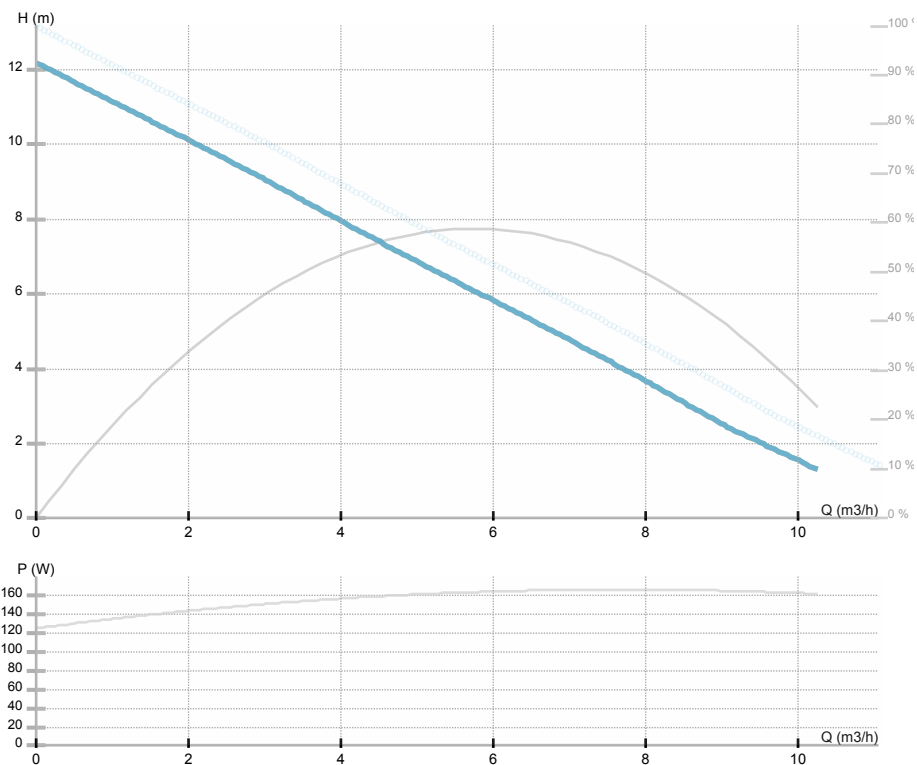

ELECTRICAL DATA

Alimentare	1~230 V
Frecventa	50/60 Hz
Consumul de energie	160 W
Rotatii pe minut RPM	7200 rpm
Clasa de izolatie	F (155 °C)
Consum curent	1.2 A
Protectie	IP44
Thermal protection	NTC
Frame size	

INSTALLATION

Fluide aprobate	Water VDI 2035, glycol 40%
Temperatura agentului	-10.0 ÷ 110.0 °C
Temperatura maxima ambientala	40 °C
Distanța între axe	180 mm
DN	32
Racord	G 2
Conexiune	G 2

MATERIAL

Materialul rulmentului	Grafit fara plumb
Materialul elicei	PES GF 30
Materialul hidraulic	Fonta
Materialul axului	AISI 420

NMT SMART II 32/120-180

979528392

NMT SMART II / Electronically regulated circulating pump






NMT SMART II 32/120-180

979528392

NMT SMART II / Electronically regulated circulating pump

Dimensiuni de gabarit

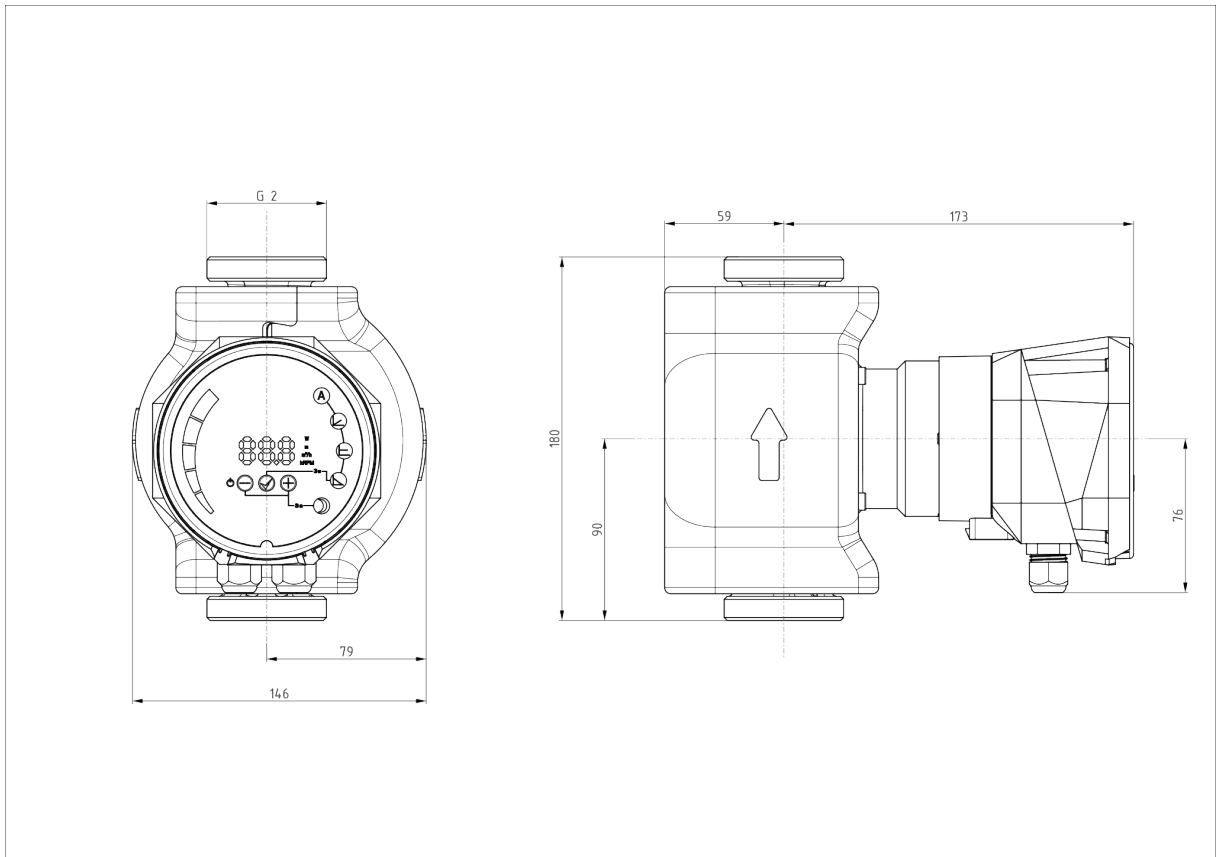

L=180 l=190 DN=32 D2=2




NMT SMART II 32/120-180

979528392

NMT SMART II / Electronically regulated circulating pump

Schema electrica

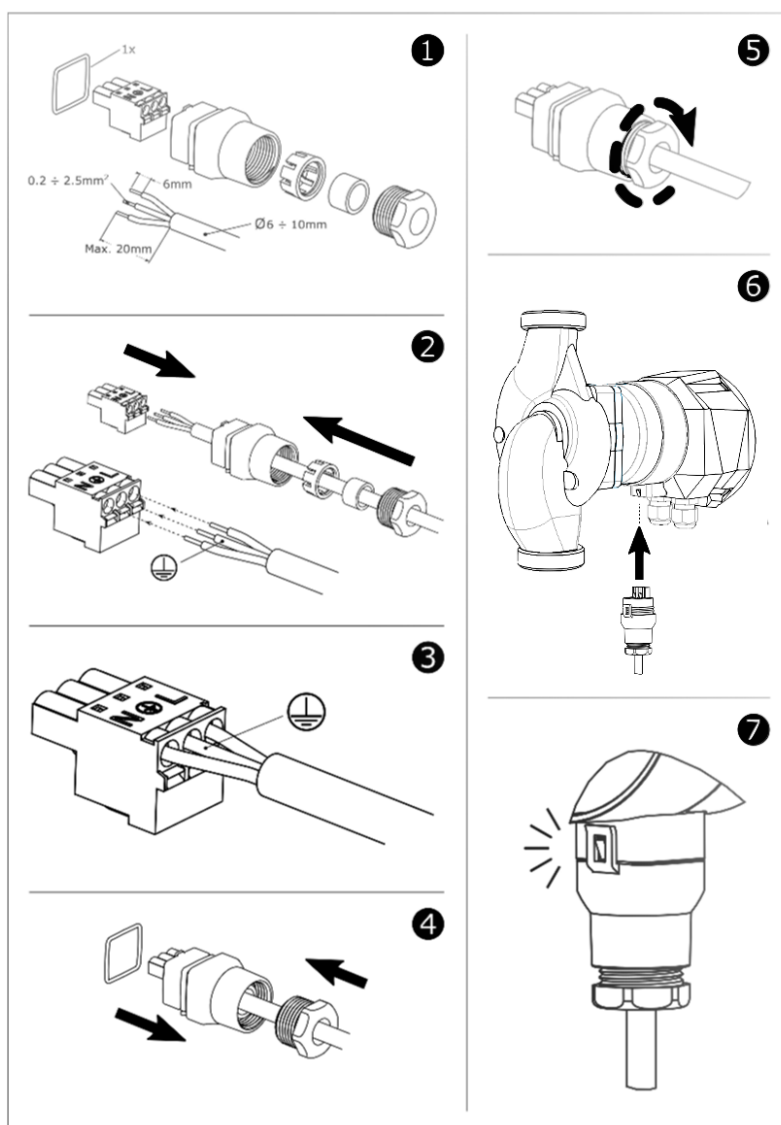



NMT SMART II 32/120-180

979528392

NMT SMART II / Electronically regulated circulating pump