





## NMTD PLUS 25/40-180

NMT PLUS / Electronically regulated circulating pump  
 Heating/cooling, Klimatizacija

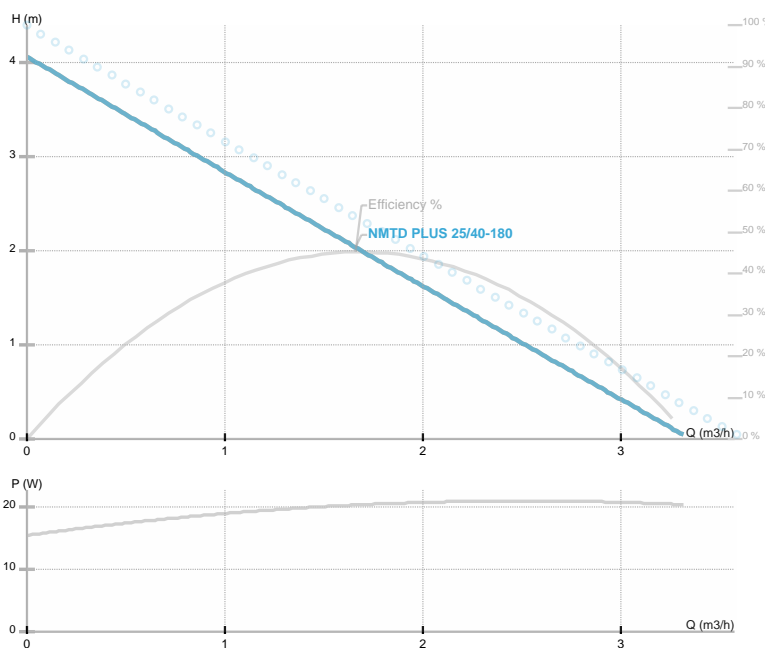

Seria produsului	<b>979523937</b>
Power supply	<b>1~230 V</b>
Declared protection	<b>IP44</b>
Q max	<b>3.32 [m³/h]</b>
H max	<b>4.1 [m]</b>
Rotatii pe minut RPM	<b>3500 [1/min]</b>
Consumul de energie	<b>21 [w]</b>
Consum curent	<b>0.2 [A]</b>
Fluide aprobate	<b>Water VDI 2035, glycol 40%</b>
Fluid temperature	<b>-10.0 ÷ 110.0 [°C]</b>
Clasa de izolatie	<b>F</b>
D n	<b>25 [mm]</b>
Racord	
Greutate	<b>4,91 [kg]</b>
Distanța între axe	<b>180 [mm]</b>
Aprobari	<b>CE EAC</b>
EEl	<b>0,15</b>
Eficiența	<b>45,44 [%]</b>
Materialul elicei	<b>Noryl 1630V</b>
Materialul rulmentului	<b>Ceramics</b>
Materialul axului	<b>Ceramics</b>
Materialul hidraulic	<b>Cast iron</b>
Frecvența	<b>50 Hz</b>
Connection	
Presiune maxima	<b>1.0 MPa</b>
Temperatura maxima ambientala	<b>40 deg C</b>

Dimension drawing

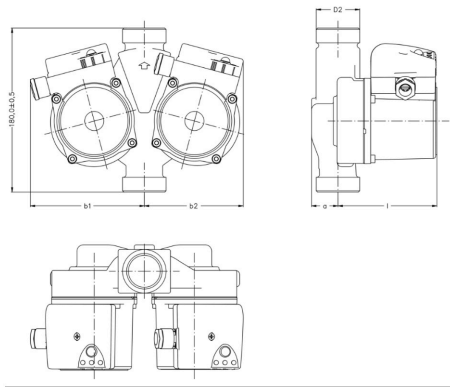

L=180 DN=25 b1=125 b2=108 l=108 a=29 D2=6/4

Electrical drawing

