





NMTD PLUS 32/80-180

NMT PLUS / Electronically regulated circulating pump
 Heating/cooling, Klimatizacija

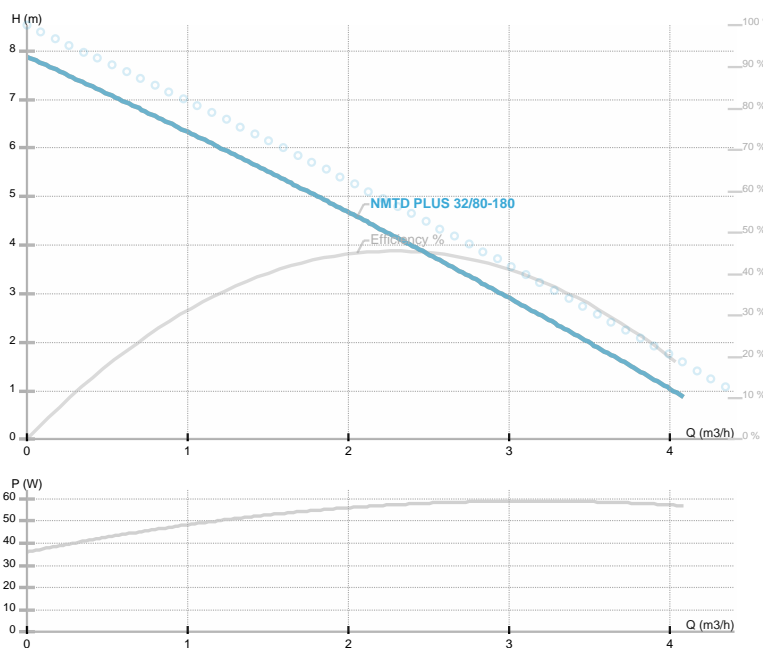

Seria produsului	979523942
Power supply	1~230 V
Declared protection	IP44
Q max	3.46 [m³/h]
H max	7.66 [m]
Rotatii pe minut RPM	4800 [1/min]
Consumul de energie	57 [w]
Consum curent	0.5 [A]
Fluide aprobate	Water VDI 2035, glycol 40%
Fluid temperature	-10.0 ÷ 110.0 [°C]
Clasa de izolatie	F
D n	32 [mm]
Racord	Rp 1¼
Greutate	5,20 [kg]
Distanta intre axe	180 [mm]
Aprobari	CE EAC
EEL	0,19
Eficienta	36,09 [%]
Materialul elicei	Noryl 1630V
Materialul rulmentului	Ceramics
Materialul axului	Ceramics
Materialul hidraulic	Cast iron
Frecventa	50 Hz
Connection	Rp 1¼
Presiune maxima	1.0 MPa
Temperatura maxima ambientala	40 deg C

Dimension drawing

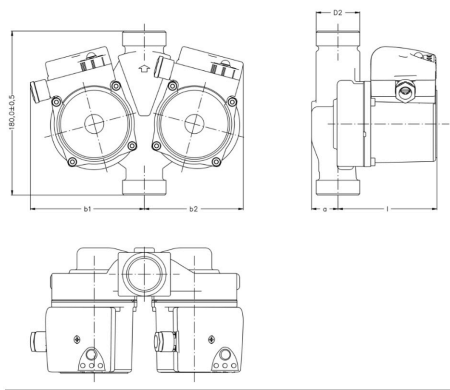

L=180 DN=32 b1=125 b2=108 l=108 a=29 D2=2

Electrical drawing

