


Tech. data: SAN 25/60-130

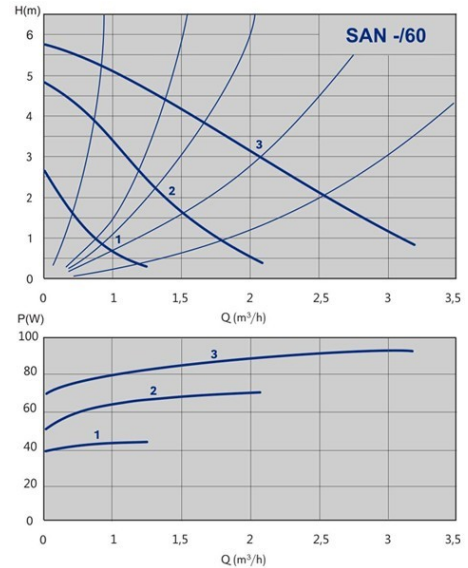

CODE: 979521770

TECHNICAL DATA:

Q max: 3 m³/h
 H max: 5,3 m
 System pressure: PN 10 bar
 Nr. of speeds: 3

ELECTRICAL PARAMETERS:

Power: 90 W
 Declared current: 0,17 - 0,39 A
 Power supply: 1 ~ 230 V
 Insulating class: H
 Degree of protection: IP 44

INSTALLATION & MEDIUM:

Pipe connection: G 1 1/2 "
 Port-to-port length: 130 mm
 Liquid temperature range: +5 do +65 °C
 Environment temperature range: 0 do 40 °C
 Max. working pressure at 50/80/110°C: 0,05/0,4/1,1 bar


MATERIALS:

Impeller material: noryl
 Housing material: bronze


OTHERS:

Casing construction: single
 Net weight: 2,4 kg
 Gross weight: 2,5 kg
 Volume of packaging: 0,002842 m³

Diagram and el. wiring: SAN 25/60-130

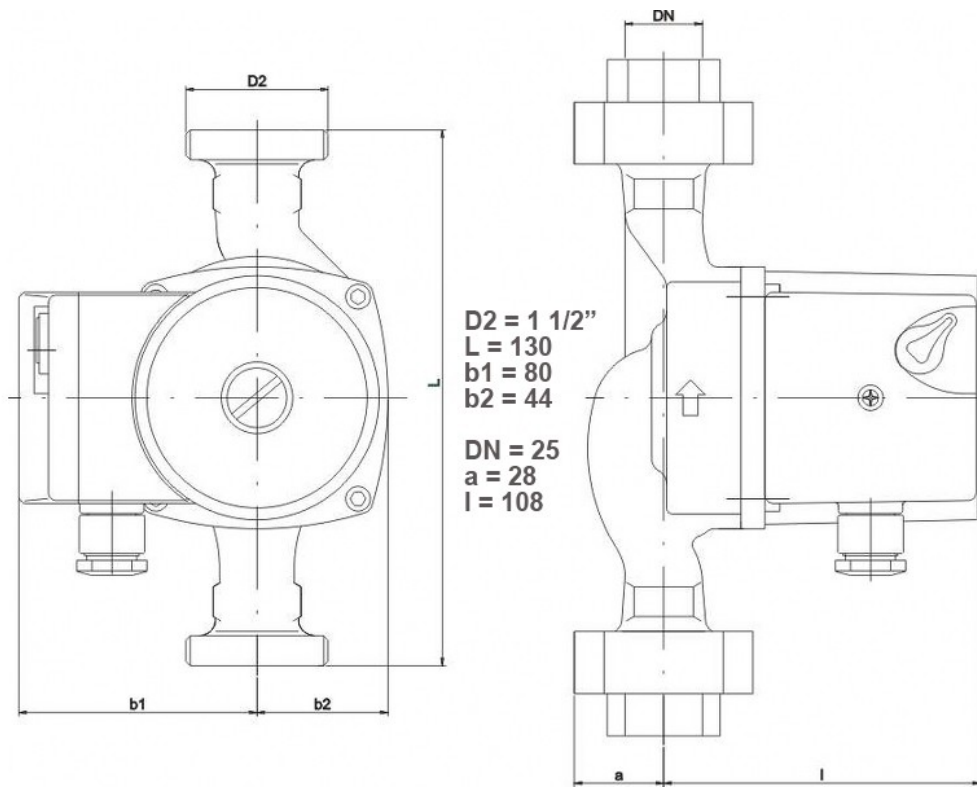

1

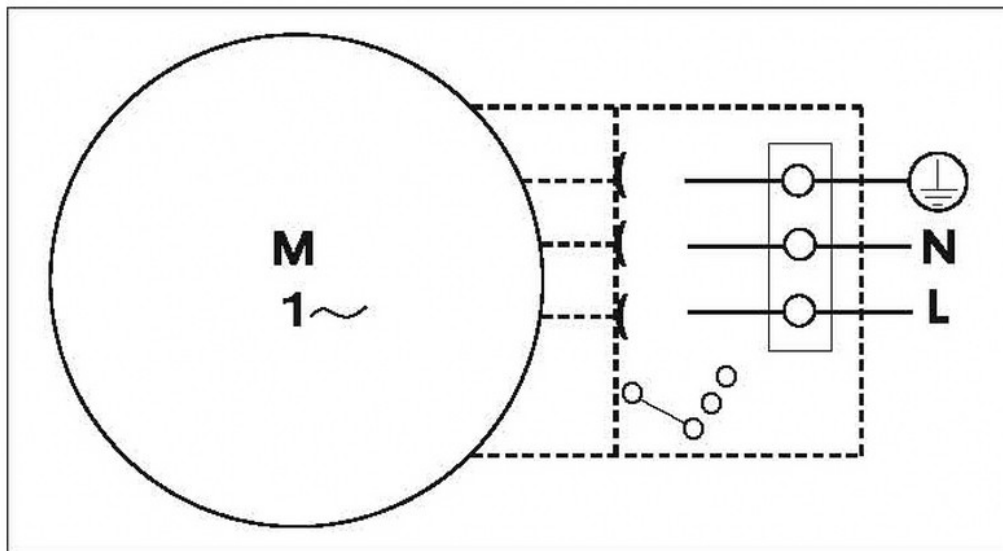

2